


REMA BATTERY CONNECTOR DIN80



Product features and advantages

- > Specifically designed for the quick and opportunity charging of large battery capacities
- > Suitable for lead gel accumulators and lithium-ion batteries
- > Corresponds to the DIN VDE 0632-589 and EN 1175-1
- > Spring supported contact system for
 - > optimal contact pressure
 - > high electrical conductivity
- > High-grade contacts made out of pure high conductive Cu-ETP copper with silver plated surface and an anti-friction and tarnish coating ensure
 - > power transition with minimal losses
 - > long life
- > Durable because of acid resistant design
- > Suitable for cable sizes up to 35 mm²
- > Direct crimping without reducing bushing for all cable size
- > Wide range of accessories
 - > different handle shapes
 - > 1 pair of additional auxiliary and 1 pair of pilot contacts
 - > cooling system with air supply through
- > Typical applications
 - > forklift trucks
 - > battery charging systems
 - > sweeper and RCC devices

1. STRUCTURE / PART-NUMBERS

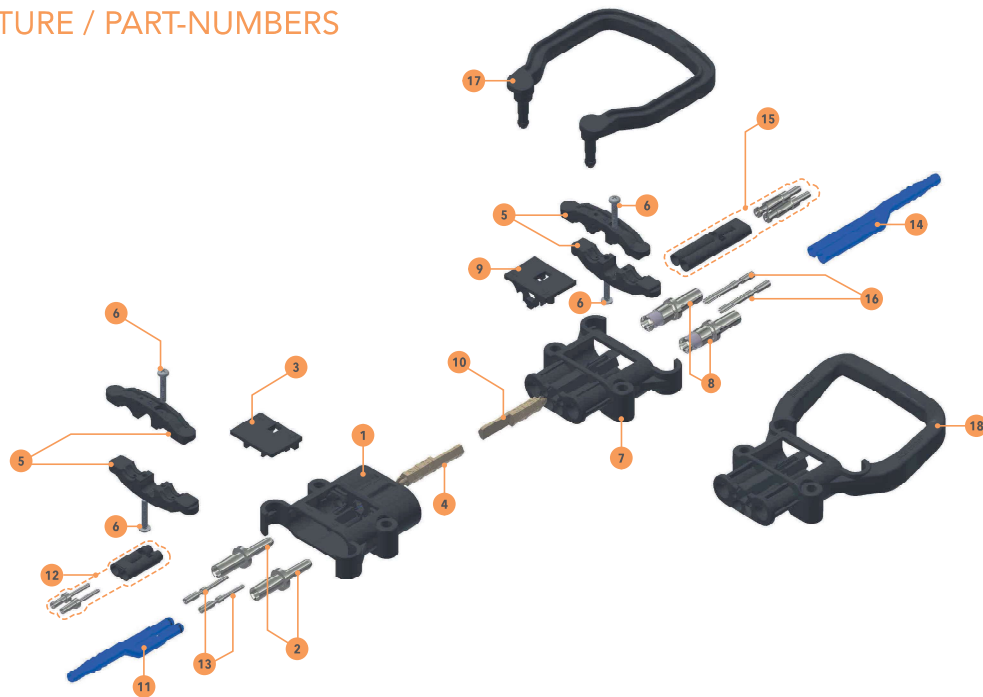

PLUG AND SOCKET SETS DIN80

DESCRIPTION	SET PARTS	CROSS SECTION	6mm ²	10mm ²	16mm ²	25mm ²	35mm ²
DIN80 plug; grey coding; acid resistant	1/2/3/4/5(2x)/6	PART-NO.	108892	111077	108891	108894	108895
DIN80 socket; grey coding; acid resistant	5(2x)/6/7/8/9/10	PART-NO.	---	---	108913	108919	108922
DIN80 socket; grey coding; fixed handle; acid resistant	5(2x)/6/8/9/10/18	PART-NO.	---	---	108914	108935	108920

ADDITION PARTS DIN80

DESCRIPTION	POSITION	PART-NO.
DIN80 air adapter plug (6 / 8 mm connection)	11	100469
DIN80 pilot cont. set plug	12	108649
DIN80 aux cont. for plug	13	102641
DIN80 air adapter socket (6 / 8 mm connection)	14	100468
DIN80 pilot cont. set socket	15	108657
DIN80 aux cont. for socket	16	102663
DIN80 coding pin green	4	100075
DIN80 coding pin yellow	4	100074
DIN80 coding pin green	10	100075
DIN80 handle; flat; with 2 screws M6x30	17	108905
DIN80 handle; flat; with 2 screws M6x45	17	108911
DIN80 handle grey (clip)	17	100441

2. TECHNICAL SPECIFICATIONS

GENERAL

> Nominal voltage U_N	150 V DC
> Current rating $I_N^{(1)}$	80 A acc. DIN VDE 0623-589
> Test voltage	2 kVAC acc. EN 1175-1
> Temperature range (incl. self-heating)	-20 °C ... +105 °C -4 °F ... +221 °F
> Whole plugging line	app. 23 mm
> Plugging line main contact	app. 11,5 mm
> Plugging line auxiliary contact	app. 11,5 mm

(1) depending on the cable crosssection, see page 5

STANDARDS

- > DIN VDE 0623-589
- > DIN EN 1175-1 (VDE 0117-1)
- >  File E226710

MATERIAL HOUSING

	Standard	>PP-GF30<	>PA-GF30<
> Color		grey sim. RAL7016	black sim. RAL9005
> Halogen-free	DIN VDE 0472-815	yes	yes
> UV resistant		yes	yes
> Ozon resistant		limited	no
> Battery acid resistant	EN 1175-1	yes	no
> Flammability	UL-94 IEC60695	HB	HB
> Comparative Tracking Index	IEC 60112	600 V	550 V

MATERIAL CONTACTS


- > Electrolytic high conductive copper Cu-ETP acc. EN 13601 and silver plated surface

3. HEATING OF MAIN CONTACTS

The REMA DIN80 connector system is designed for optimum performance when used 16 mm² cross section cable according DIN VDE 0623-589.

At other cable cross section the nominal operation current I_N will be different.


The following curves are for reference. The actual thermal performance may vary depending upon environmental conditions.

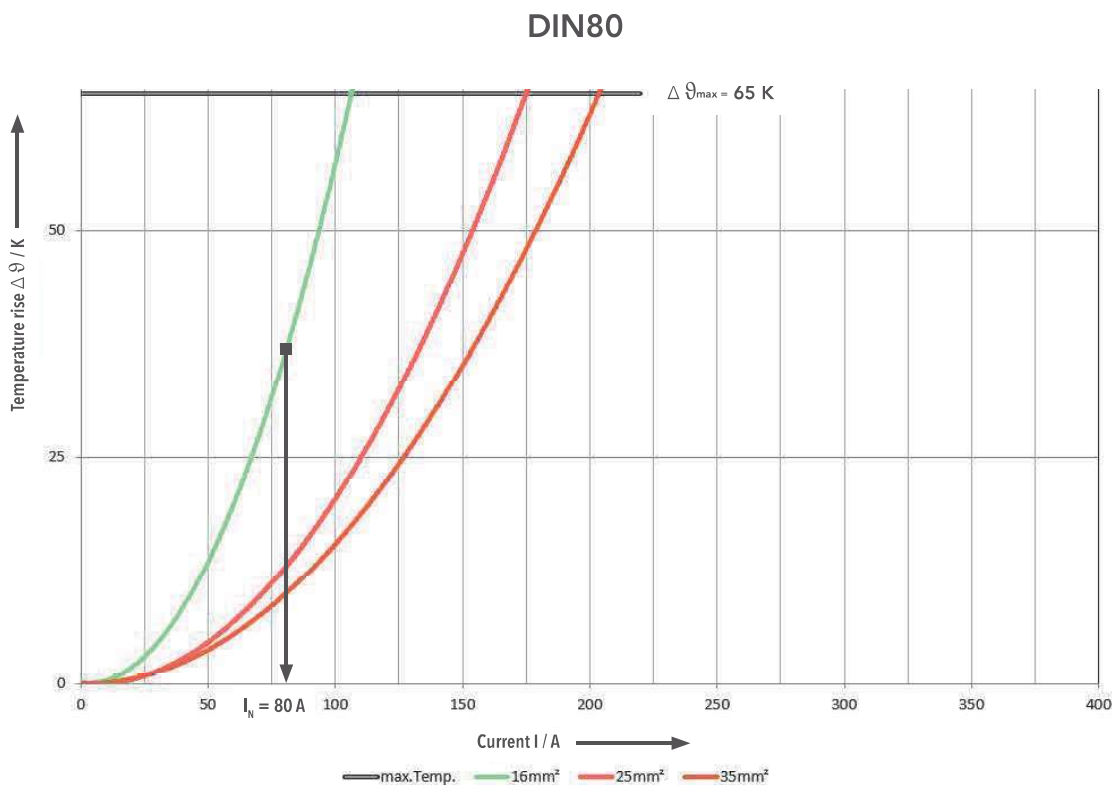

Extra fine-wired highly flexible quality - EN 60228/class 6

Please contact REMA for additional information concerning REMA DIN80 Battery Connector system.


4. DRAWINGS

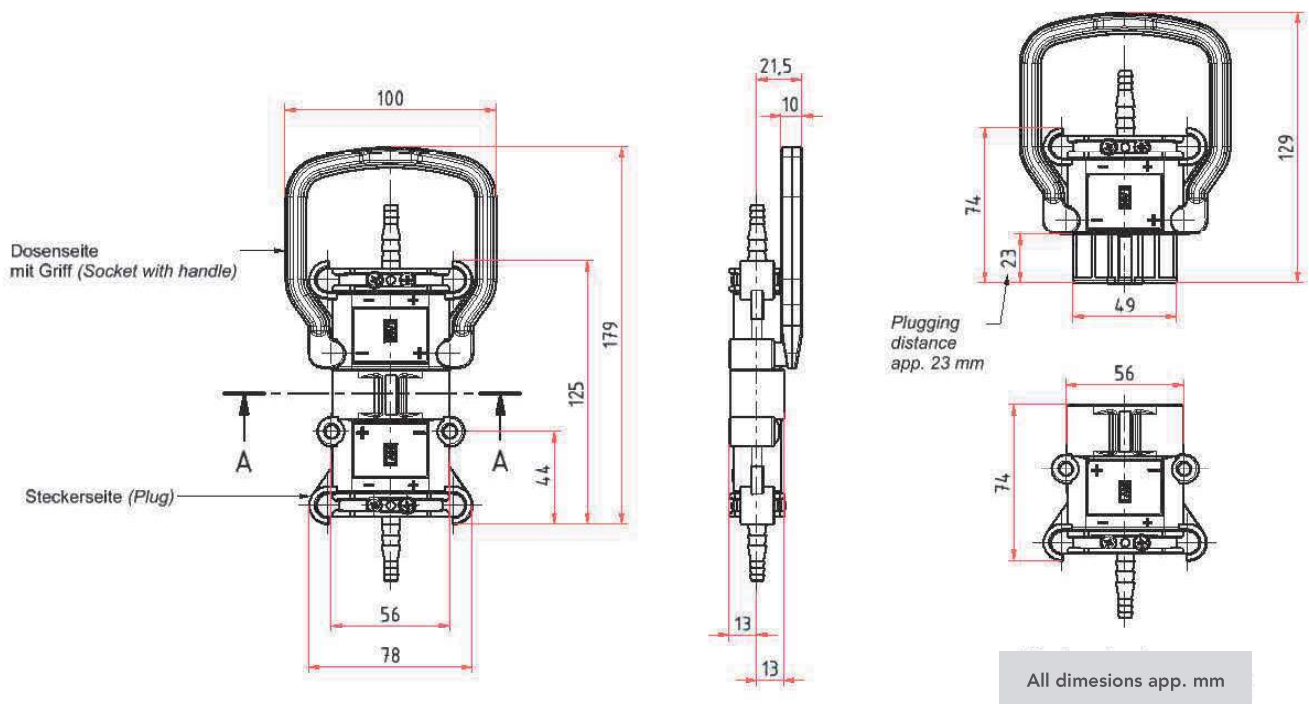

Plugging distance charts REMA Battery Connector DIN80



Preparation wire acc. DIN VDE 0623-589

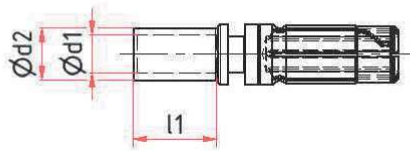

CROSS SECTION [mm ²]	$\varnothing d2$ [MM] 0,15	$\varnothing d1$ [mm] $\pm 0,05$	$l1$ [mm] $\pm 0,30$
6	8,4	3,6	18,0
10	8,4	4,6	18,0
16	8,4	6,1	20,0
25	11,0	8,1	20,0
35	12,5	9,0	20,0

5. CODING

The different types of batteries which are used on the vehicle market today (wet, dry or gel batteries), may only be charged with the right charger for this type of battery.

In extreme cases, unapproved combinations of charge system and batteries can lead to the battery destruction.

In addition, only chargers and batteries with the same voltage may be combined.

For this reason REMA has developed a specially designed coding system with colored and labelled coding pins. This system allows correct connections and prevent incorrect ones.

The REMA Coding System meets the requirements of DIN VDE 0623- 589.

All displayed product versions can **only** be used for the REMA DIN80.

Coding pin for wet batteries

- > **Current rating I:** acc. DIN VDE 0623-589
- > **Color:** Grey RAL7035
- > **Voltage range:** 24 V ... 96 V



Part-No. 100072

Coding pin for dry batteries


- > **Current rating I:** acc. DIN VDE 0623-589
- > **Color:** Green RAL6005
- > **Voltage range:** 24 V ... 96 V



Part-No. 100075

Universal coding pin (only for plugs) for wet/dry batteries

- > **Current rating I:** acc. DIN VDE 0623-589
- > **Color:** Yellow RAL1018
- > **Voltage range:** 24 V ... 96 V



Part-No. 100074